


T4/T4X | SPECIFICATIONS

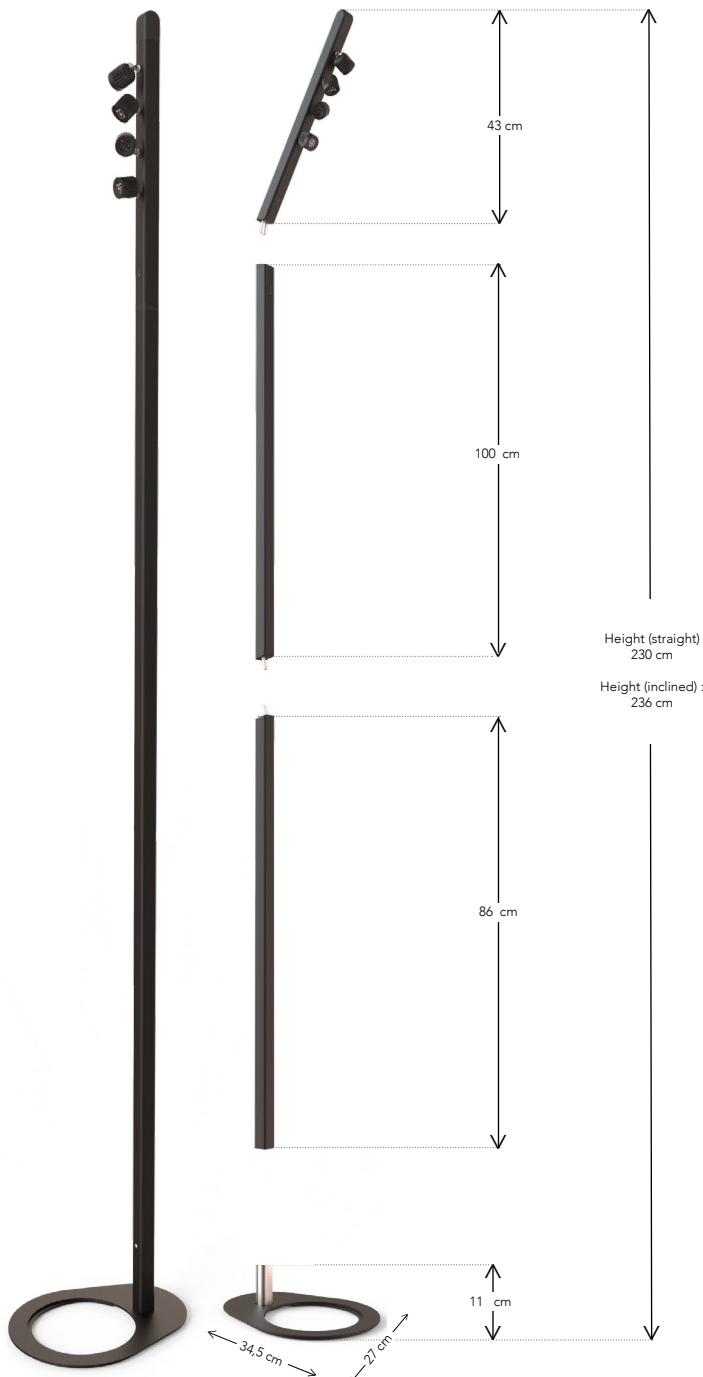

COMPOSITION

- 180° reversible head with 4 spotlights
- Vertical or inclined,
- Li-Ion battery module
- Extension module
- Base (open design)
(*contact us for full base*)

MATERIALS

- Extruded aluminium profile 6106T5
- AS13 Injected aluminium spotlight
- Hermalink® and Hermatwist® : injected polypropylene and stainless steel pins
- RF cap : injected 6-6 polyamide
- Steel base

FINISH

- Powder-coated epoxy paint
- Black RAL2100ST (textured) and White RAL9003 (fine texture)
- *Contact us for colour customization*

DIMENSIONS

- Vertical : 2,36m
- Inclined : 2,30m

LED POWER & TECHNOLOGY

- 18W (4 x 4,5 W)
- LED Cree XPG2 HE

LIGHT INTENSITY

- Up to 2000 lumens

COLOUR TEMPERATURE

- CCT White tuning (3000K to 5000K)
- 3000K
- 4000K
- RGB

OPTICAL LENSES

- 26°

BATTERY AND AUTONOMY

- 6 to 110h depending on the setting
- Li-Ion battery 14,8V / 150Wh

TEMPERATURE RANGE

- 0°C à +40°C

NORMS

- Class III
- IP43
- IK08
- CE


WEIGHT

- 6,5 Kg

WARRANTY

- 2 years
- 6 months : Li-Ion Battery on normal use

DIMMER/AUTONOMY

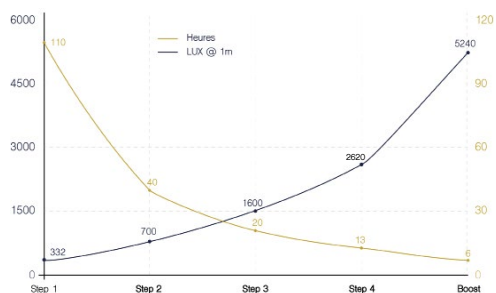




LED 3000K

- 3 LEDs 3000K per spotlight
- 13,5W (3 x 4,5 W)
- Included option

LED 4000K

- 3 LEDs 4000K per spotlight
- 13,5W (3 x 4,5 W)
- Included option



LED CCT (TUNABLE WHITE)

- 3 LEDs per spotlight : 3000K, 4000K, 5000K
- 13,5W (3 x 4,5 W)
- Included option

HIGH-CRI LED

- CRI > 90
- *Additional option*




LED RGB

- 3 LEDs per spotlight : 1 x R, 1 x G, 1 x B
- 13,5W (3 x 4,5 W)
- Included option

EXTRA BATTERY MODULE

- 14.8V Li-Ion Battery
- 150Wh



ON MAINS (WITHOUT BATTERY)

- 100-240V AC / 50-60Hz external power supply
- 15V DC / 1,2A
- Interchangeable AC plugs

TRANSPORTATION CASE

- For 2 x T4 or 3 x T4
- Pre-wired waterproof case
- Dimensions : 1177 X 440 X 158 mm



CART

- For up to 4 cases
- On wheels